




R.P.M. 2850

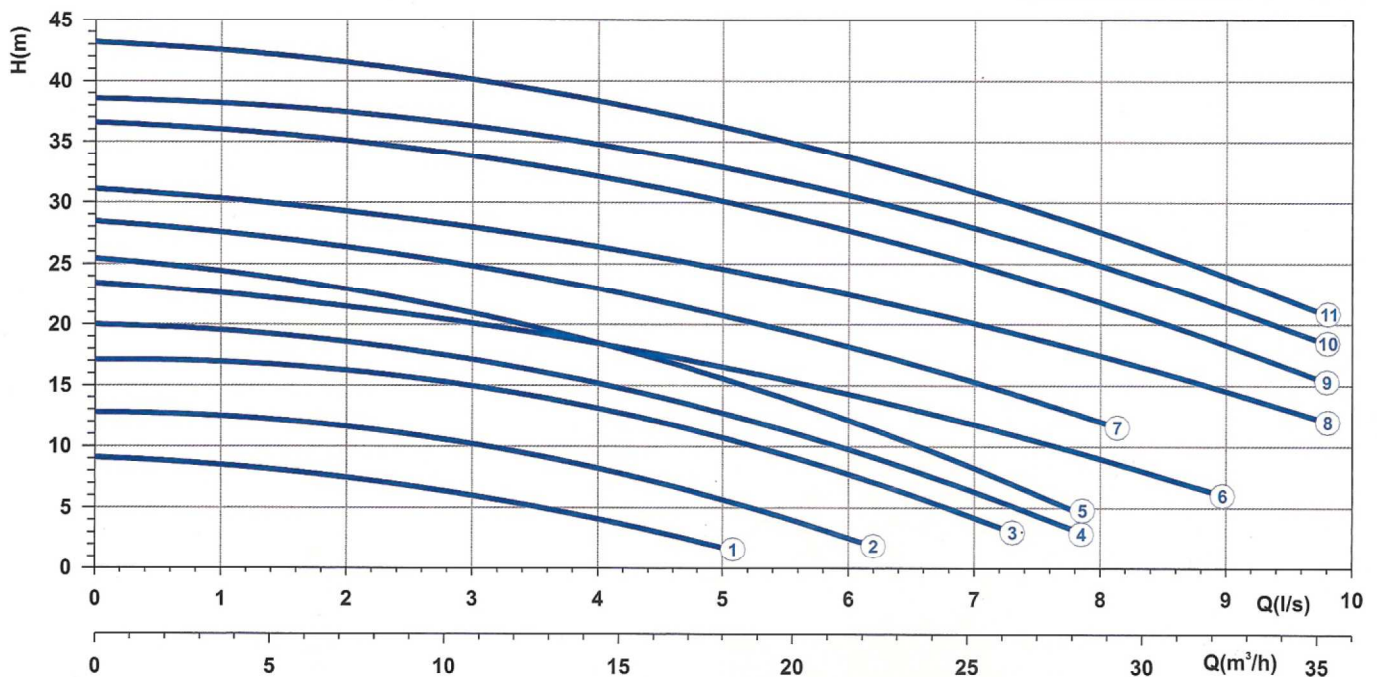

Curve N°	Code	Type	MOTOR			Power Supply	DN mm	Free Pass. mm	Weight Kg	code	⊗
			Nominal P P2 (kW)	Nominal I I (A)	Starting I Is (A)						
1	7003667	B271M6D5-J6KB1	0,8	5,5	19,2	1ph 230V-50Hz	40	6	45	7003667	
	7003668	B271T6D5-J6KA0	0,9	2,5	11,5	3ph 400V-50Hz	40	6	45	7003692	
2	7003665	B271M6D4-J6KB1	1,1	7,5	21	1ph 230V-50Hz	40	6	45	7003701	
	7003666	B271T6D4-J6KA0	0,9	2,5	11,5	3ph 400V-50Hz	40	6	45	7003691	
3	7003663	B271M6D3-J6KB1	1,1	7,5	21	1ph 230V-50Hz	40	6	45	7003700	
	7003664	B271T6D3-J6KA0	1,4	3,5	14	3ph 400V-50Hz	40	6	45	7003690	
4	7003661	B271M6D2-J6KB1	1,8	10	35	1ph 230V-50Hz	40	6	45	7003699	
	7003662	B271T6D2-J6KA0	1,4	3,5	14	3ph 400V-50Hz	40	6	45	7003689	
5	7003659	B271M6D1-J6KB1	1,8	10	35	1ph 230V-50Hz	40	6	45	7003698	
	7003660	B271T6D1-J6KA0	2,4	5	21	3ph 400V-50Hz	40	6	45	7003688	
6	7003658	B209T6D2-J7KA0	3,2	6,5	31,8	3ph 400V-50Hz	40	7	64	7003687	
7	7003657	B209T6D1-J7KA0	3,2	6,5	31,8	3ph 400V-50Hz	40	7	64	7003686	
8	7003656	B210R6D4-J7KA2	4,1	8,5	50,2	3ph 400/690V-50Hz	40	7	78	7003685	
9	7003655	B210R6D3-J7KA2	5	11	64,9	3ph 400/690V-50Hz	40	7	78	7003684	
10	7003654	B210R6D2-J7KA2	5	11	64,9	3ph 400/690V-50Hz	40	7	78	7003683	
11	7003653	B210R6D1-J7KA2	5,7	12,5	73,7	3ph 400/690V-50Hz	40	7	78	7003682	