




R.P.M. 2850 - 1450

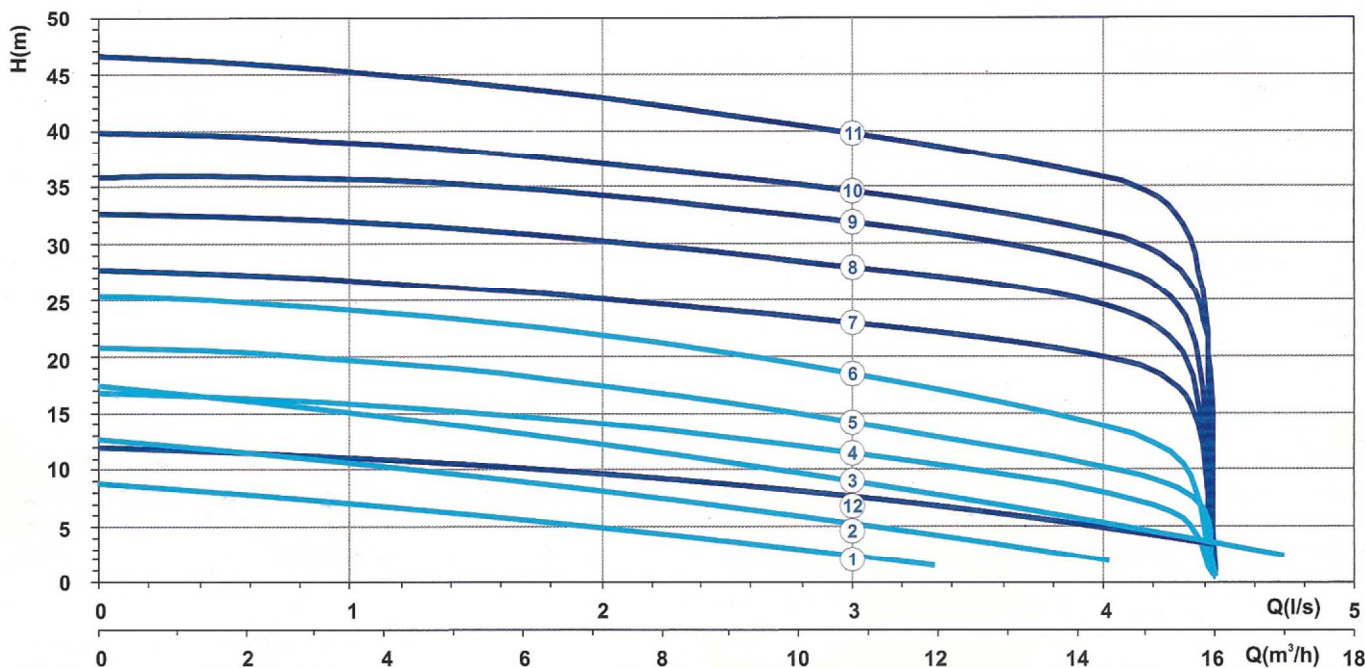

Curve N°	Code	Type	MOTOR			Power Supply	DN mm	Free Pass. mm	Weight Kg	code	Ex
			Nominal P P2 (kW)	Nominal I I (A)	Starting I Is (A)						
1	7003219	G272M3T3-J6AD1	1,1	7,5	21	1ph 230V-50Hz	40	6	30	-	-
	7009022	G272T3T3-J6AA0	1,4	3	8,4	3ph 400V-50Hz	40	6	30	-	-
2	7009108	G272M3T2-J6AD1	1,1	7,5	21	1ph 230V-50Hz	40	6	30	-	-
	7009019	G272T3T2-J6AA0	1,4	3	8,4	3ph 400V-50Hz	40	6	30	-	-
3	7009756	G272M3T1-J6AD1	1,1	7,5	21	1ph 230V-50Hz	40	6	30	-	-
	7008128	G272T3T1-J6AA0	1,4	3	8,4	3ph 400V-50Hz	40	6	30	-	-
4	7003031	G271M6T3-J6AD1	1,1	7,5	21	1ph 230V-50Hz	40	6	40	-	-
	7002052	G271T6T3-J6AA0	1,4	3,5	14	3ph 400V-50Hz	40	6	40	7002789	-
5	7003028	G271M6T2-J6AD1	1,1	7,5	21	1ph 230V-50Hz	40	6	40	-	-
	7002051	G271T6T2-J6AA0	1,4	3,5	14	3ph 400V-50Hz	40	6	40	7002701	-
6	7003026	G271M6T1-J6AD1	1,8	10	35	1ph 230V-50Hz	40	6	40	-	-
	7002050	G271T6T1-J6AA0	2,4	5	21	3ph 400V-50Hz	40	6	40	7002788	-
7	7001041	G209T6T2-J7AA0	3,2	6,5	31,8	3ph 400V-50Hz	40	7	52	7002808	-
8	7001042	G209T6T1-J7AA0	3,2	6,5	31,8	3ph 400V-50Hz	40	7	52	7009498	-
9	7001924	G210R6T3-J7AA2	4,1	8,5	50,1	3ph 400/690V-50Hz	40	7	66	7002803	-
10	7001923	G210R6T2-J7AA2	5	11	65	3ph 400/690V-50Hz	40	7	66	7002802	-
11	7001600	G210R6T1-J7AA2	5	11	65	3ph 400/690V-50Hz	40	7	66	7002801	-
12	7006572	G408T6T1-J7AA0	1,1	3	12	3ph 400V-50Hz	40	7	40	-	-